


## PART 2 - MOUNTING ASSEMBLED TOP TO BOAT

Mounting begins by positioning the top on the boat to decide where the mounting hinges should go. Decide what area the Bimini Top will cover. For instance:

- Will it cover driver and the passenger ?
- Does it cover as far back on the deck as needed ?
- Where will it lay when folded flat ?

Locate the middle of the top and this is where the mounting hinges should be mounted on either side of the Gunwales of the boat (sides). The frame is designed to flex easily to the proper mounting width.

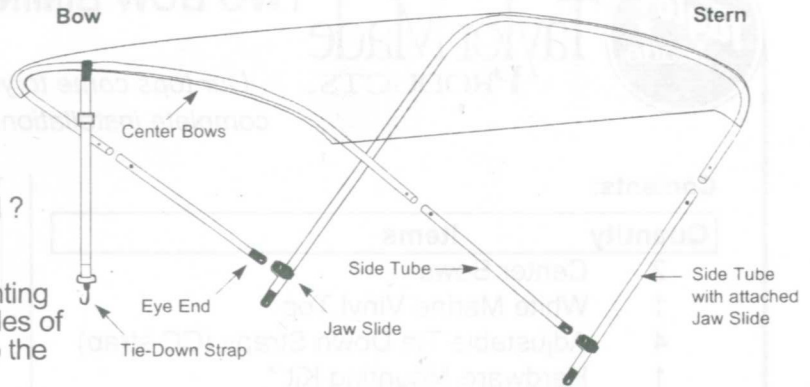

1. Choose either the vertical or horizontal mounting hinges, whichever one fits your application best. Secure these to both sides of the boat using the (4) 3/4" self tapping Phillips head screws provided. A small pilot hole using a 1/8" drill may be used to aid alignment. Be sure that deck mounts are directly in line with one another across the boat.
2. Position the stern of the top toward the rear of the boat and attach the eye end on the side tubes on each side, to the mounting hinges using the screws that are provided in the deck mounts themselves. Secure but do not overtighten.
3. Have another person hold the top in unfolded position and locate the places where you will attach the four eye straps for the tie down straps. Eye straps should be placed as far out as practical so that the top spreads out when the tie down straps are tightened. At the same time making sure that there is enough adjustment in the straps to loosen and tighten. Use the eye strap to locate position for 1/8" pilot holes and drill them. Screw the eye straps into the boat, using the (8) 5/8" phillips screws.
4. Attach tie down snaps to eye straps on the Gunwales.
5. It may be necessary to adjust the tension of the tie down straps to ensure that the top is taut and does not sag.

### TWO YEAR LIMITED WARRANTY

Taylor Made Products warrants its Bimini BoaTop® to be free from defects in workmanship and material.

Under the terms of this warranty, any Taylor★Made® Bimini BoaTop® found defective 12 months from the date of purchase, will be repaired or replaced, at Taylor Made Products' option, at no charge. Any Bimini Top proven defective from 13 months to 24 months from the date of purchase will be pro-rated. Repairs will be made and a charge for labor and materials may apply. Bimini Tops requiring full replacement will carry a maximum replacement cost NOT TO EXCEED 50% of the current suggested list price of the item.

All Bimini Tops must be returned to the Taylor Made Products to qualify for warranty. DO NOT RETURN PRODUCTS TO YOUR DEALER. Proof of purchase must be included. Transportation charges to the Nelson A. Taylor Co., Inc. are the responsibility of the customer. Before returning the defective product, please call 10800-628-5188 for a return authorization number.

This warranty does not cover damage caused by improper use, accidents, or acts of nature. Bimini Tops that are allowed to pocket water or ice, come into contact with chemicals or tree sap, or Bimini Tops that are not properly tied down are not covered under this warranty.

TAYLOR MAKES NO EXPRESS OR IMPLIED WARRANTIES OTHER THAN WARRANTIES SET FORTH HEREIN, INCLUDING, WITHOUT LIMITATION, THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR FROM ANY COURSE OF DEALING OR TRADE USAGE.

TAYLOR SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, PUNITIVE OR CONSEQUENTIAL DAMAGES, INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF OPPORTUNITY OR BUSINESS PROFITS, BUSINESS INTERRUPTION OR ANY OTHER LOSS EVEN IF TAYLOR HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

IN NO EVENT SHALL TAYLOR BE LIABLE FOR ANY AMOUNT IN EXCESS OF THE PURCHASE PRICE PAID.

### TAYLOR MADE PRODUCTS

65 Harrison Street, Gloversville, NY12078  
1-800-628-5188

A Member of the Taylor Made Group™

® Taylor★Made is a registered trademark of the Nelson A. Taylor Co., Inc.